


Top View



Front View

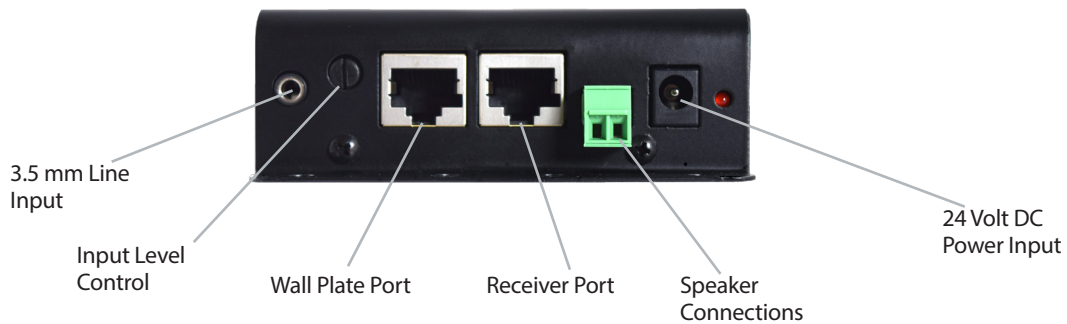

The **CA-30 Classroom Amplifier** is designed to complement projectors or flat panel displays to provide high quality playback of multimedia audio. The CA-30 amplifier is the perfect solution for evenly distributing music and other auxiliary sound throughout a classroom and an affordable price.

- Versatile mounting system
- Mounts directly to projector poles
- Mount in plenum rated ceiling enclosures or inside cabinets
- Plug and play compatibility with Audio Enhancement's XD or IR classroom microphones





CA-30 Amplifier Specifications

Electrical Characteristics:

Output Power

THD @ 1% (4 Ohm load)	16 Watts
-----------------------	----------

Frequency Response	20 Hz to 20,000 kHz
--------------------	---------------------

Connectors

One 3.5 mm input with volume control
 Accessory port (RJ-45) with balanced line input
 unbalanced line output
 RJ-45 input for IR-Satellite (TLD100) or XD Receiver (K-SRC14), provides
 both audio and power
 24 DC Power Input
 Speaker connection

Material	Metal
----------	-------

Weight	.45 lbs (7.2 oz)
--------	------------------

Dimensions	4.25 in. (L) x 3.625 in. (W) x 1.25 in. (H) (10.8 cm x 9.2075 cm x 3.18 cm)
------------	---
